




SENSOR SWITCH NON MERCURY

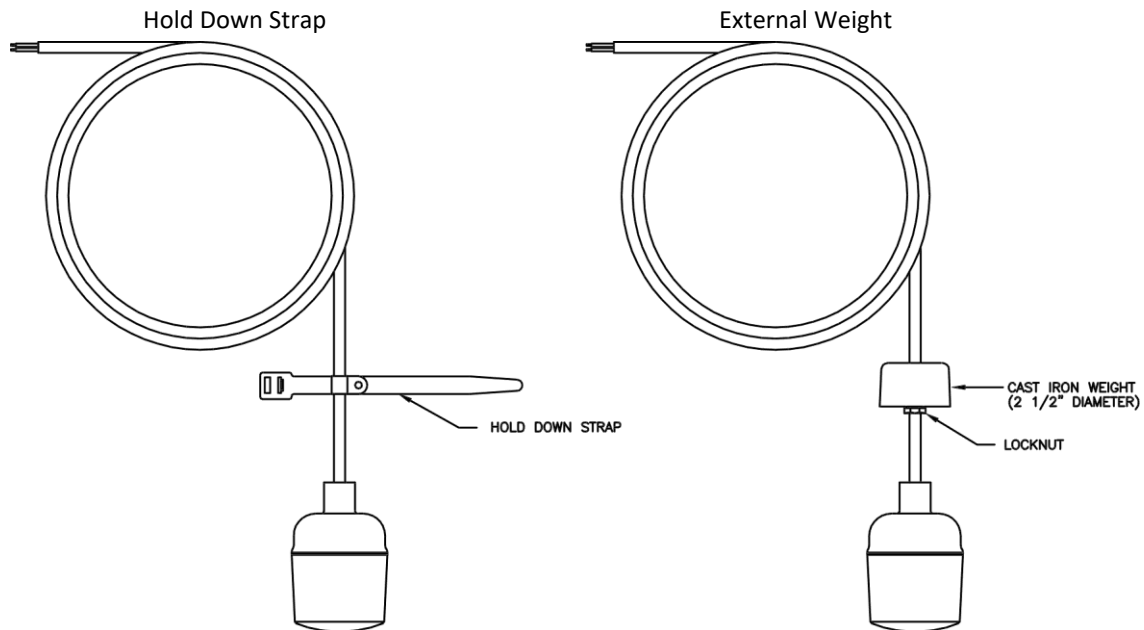

ADVANTAGES

- CSA certified and UL listed
- Compact design
- The NON MERCURY design can be used in both potable and non-potable sewage applications
- Standard cord lengths from 10 to 55 ft. (Consult the factory for special lengths.)
- A two year limited warranty
- Available with internal or external weights and/or hold down straps. Available in 3 wire normally open and normally closed.

SPECIFICATIONS

ELECTRICAL RATINGS: 10A, 120/240AC 60HZ, 24VDC

CORD RATING: 16/2 SJOW or 16/3, 13 AMPS, water and oil resistant.

FLOAT: 2.68 Diameter x 2.44 High, corrosion resistant PVC for use in liquids up to 140°F.

NOTE

This switch requires a minimum tether length of 4 inches.

TYPICAL APPLICATIONS

