




WIDE ANGLE FLOAT SWITCH THE DEPENDABLE NON MERCURY LEVEL CONTROL

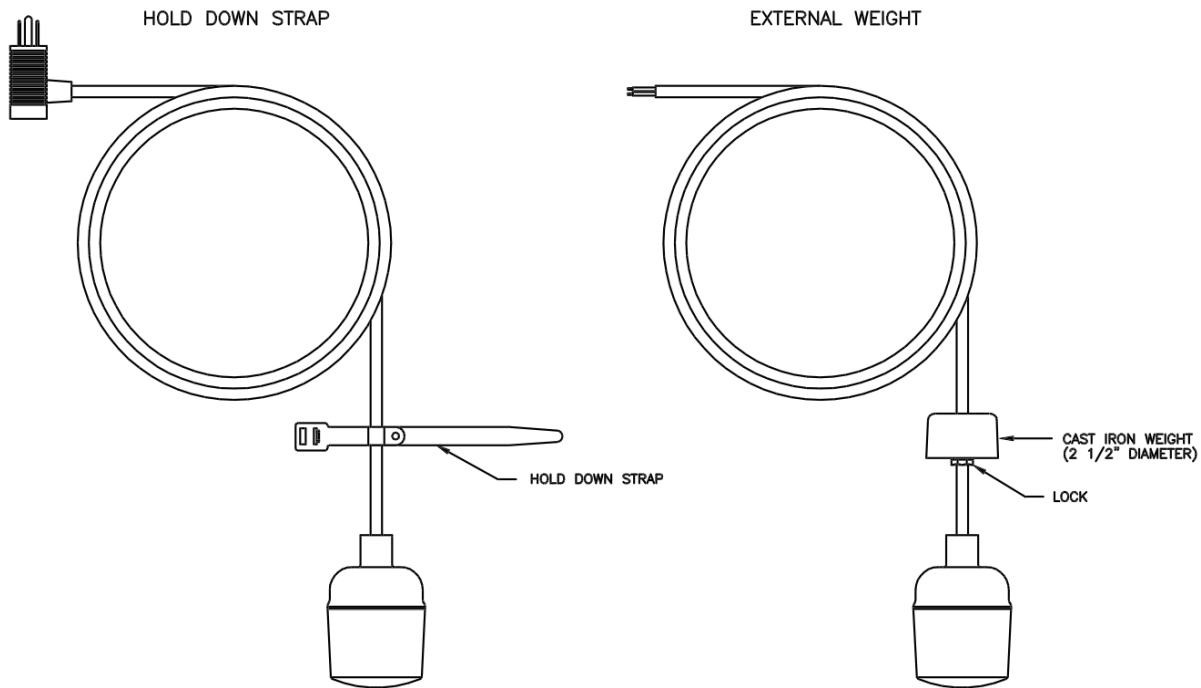

ADVANTAGES

- CSA certified and UL listed
- The NON MERCURY design can be used in both potable and non-potable sewage applications.
- The WIDE ANGLE FLOAT SWITCH directly controls pumps up to ½ HP/120VAC and 1HP/240VAC.
- The compact design allows the switch to operate in limited space applications.
- A two year limited warranty
- The pumping range can be adjusted by simply changing the tether length.
- Available with internal or external weights and/or hold down straps. Available in 3 wire normally open and normally closed.

SPECIFICATIONS

ELECTRICAL RATINGS: W.L. model - 13A, 120/1/60, 1/2HP
- 13A, 240/1/60, 1HP


CORD RATING: 16/2 SJOW or 16/3, 13 AMPS, water and oil resistant.

FLOAT: 2.68 Diameter x 2.44 High, corrosion resistant PVC for use in liquids up to 140°F.

NOTE

This float switch is to be used only on pumps equipped with integral thermal overload protection.
This switch requires a minimum tether length of 4 inches.

TYPICAL APPLICATIONS

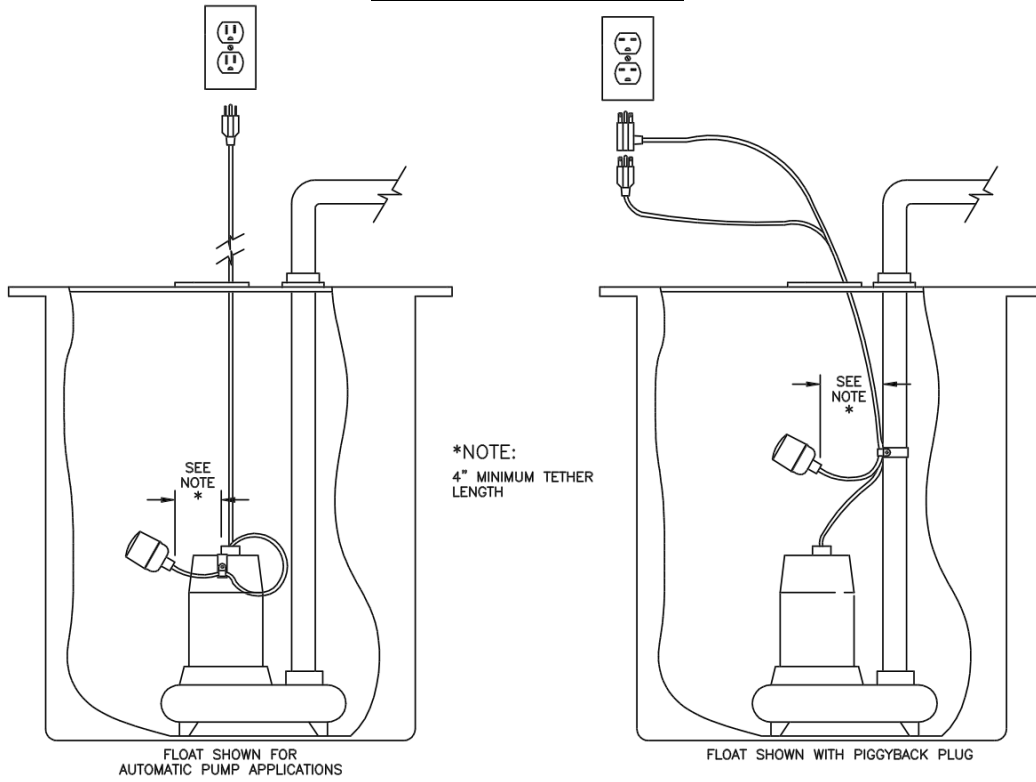

STANDARD PLUG ARRANGEMENTS

